



---

# Customer information packet

## EM2506T-G

7.5HP, 1180RPM, 3PH, 60HZ, 254T, 3950M, OPSB, F

Class -

Division - Not Applicable

## Specifications

Enclosure	OPSB
Frame	254T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA EEV UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	11.000 A @ 460.0 V 22.400 A @ 230.0 V 23.000 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

## Part detail

Revision	Y
Type	AC
Mech. spec.	39E366
Base	
Status	PRD/A
Elec. spec.	M-39WG-X747
Layout	39LYE366
Eff. date	12-09-2024
CD Diagram	CD0180
Poles	06
Leads	9#12,0#0,0#0
Proprietary	False
Created date	11-29-2011

High Voltage Full Load Amps	11.0 a
Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3950M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	23.19 IN
Power Factor	70
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**Nameplate**

<b>NP1259LUA</b>										
<b>CAT.NO.</b>	EM2506T-G									
<b>SPEC.</b>	39E366X747G1									
<b>HP</b>	7.5									
<b>VOLTS</b>	230/460									
<b>AMPS</b>	22.8/11.4									
<b>R.P.M.</b>	1180									
<b>FRAME</b>	254T	<b>HZ</b>	60	<b>PH</b>	3					
<b>SER.F.</b>	1.15	<b>CODE</b>	K	<b>DES</b>	A	<b>CLASS</b>	H			
<b>NEMA NOM. EFF.</b>	90.2	<b>P.F.</b>	68							
<b>RATING</b>	40C AMB-CONT									
<b>CC</b>	010A									
<b>DE</b>	6309	<b>ODE</b>	6208							
<b>ENCL</b>	OPSB	<b>SN</b>								
<b>USABLE AT</b>	50HZ 7.5HP 190/380V 26.4/13.2A								SF1.0	

**AC Induction Motor Performance Data**

Record # 70941

Typical performance - not guaranteed values

<b>Winding: 39WGX747-R002</b>		<b>Type: 3950M</b>		<b>Enclosure: OPSB</b>	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	7.5		<b>Full Load Torque</b>	33.36 LB-FT	
<b>Volts</b>	230/460		<b>Start Configuration</b>	direct on line	
<b>Full Load Amps</b>	22.8/11.4		<b>Breakdown Torque</b>	110 LB-FT	
<b>R.P.M.</b>	1180		<b>Pull-up Torque</b>	42.6 LB-FT	
<b>Hz</b>	<b>60 Phase</b>	3	<b>Locked-rotor Torque</b>	61.2 LB-FT	
<b>NEMA Design Code</b>	<b>A KVA Code</b>	K	<b>Starting Current</b>	76.9 A	
<b>Service Factor (S.F.)</b>	1.15		<b>No-load Current</b>	6.51 A	
<b>NEMA Nom. Eff.</b>	<b>90.2 Power Factor</b>	68	<b>Line-line Res. @ 25°C</b>	1.0034 Ω	
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	27°C	
<b>S.F. Amps</b>			<b>Temp. Rise @ S.F. Load</b>	32°C	
			<b>Locked-rotor Power Factor</b>	26.3	

**Load Characteristics 460 V, 60 Hz, 7.5 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	30	49	61	68	72	74	70
<b>Efficiency</b>	82	88.7	90.4	90.7	90.4	89.6	90.5
<b>Speed</b>	1195.7	1192.4	1188.2	1183.9	1179.4	1174.3	1181
<b>Line amperes</b>	6.99	8.06	9.59	11.4	13.5	15.9	12.7


ABB Motors and Mechanical Inc.

WINDING # 39WGx747


Typical performance - not guaranteed values.

7.5 HP 3 PH 60 HZ 1180 RPM 460 V 3950M


TORQUES (LB-FT): PO=110 PU=42.6 LR=61.2 LRA=76.9

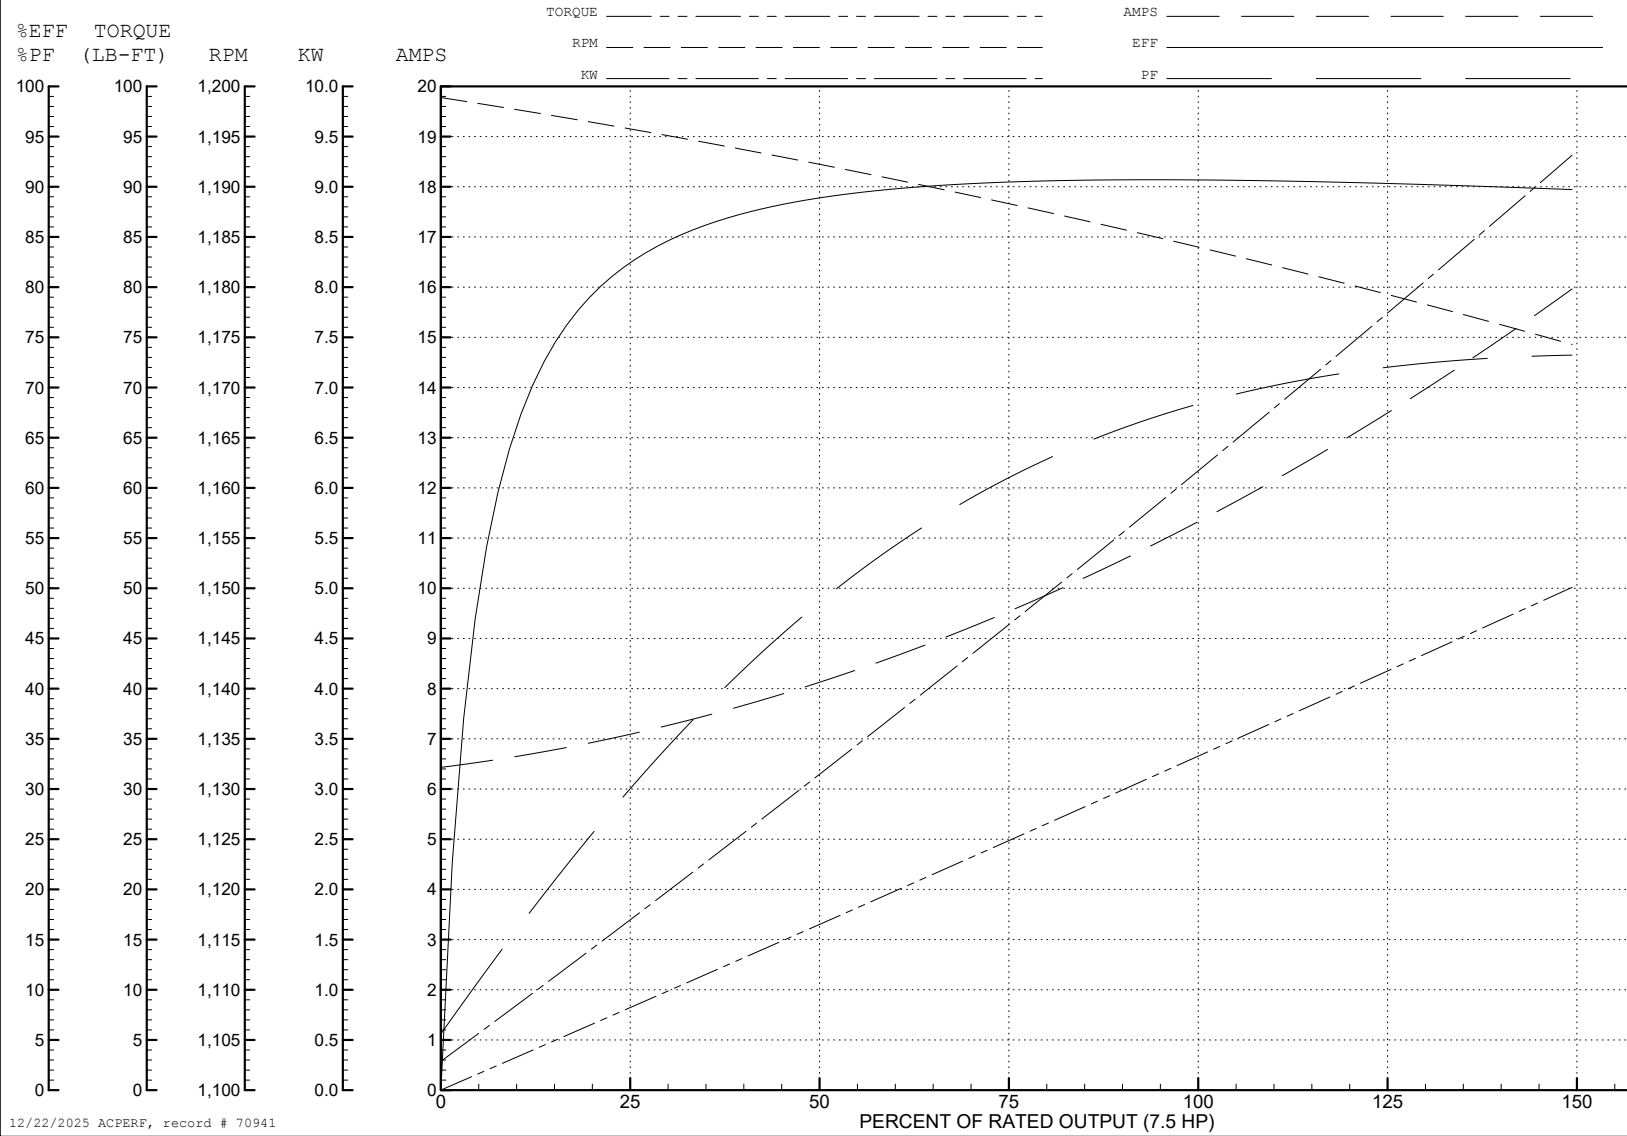


12/22/2025 ACPERF, record # 70941

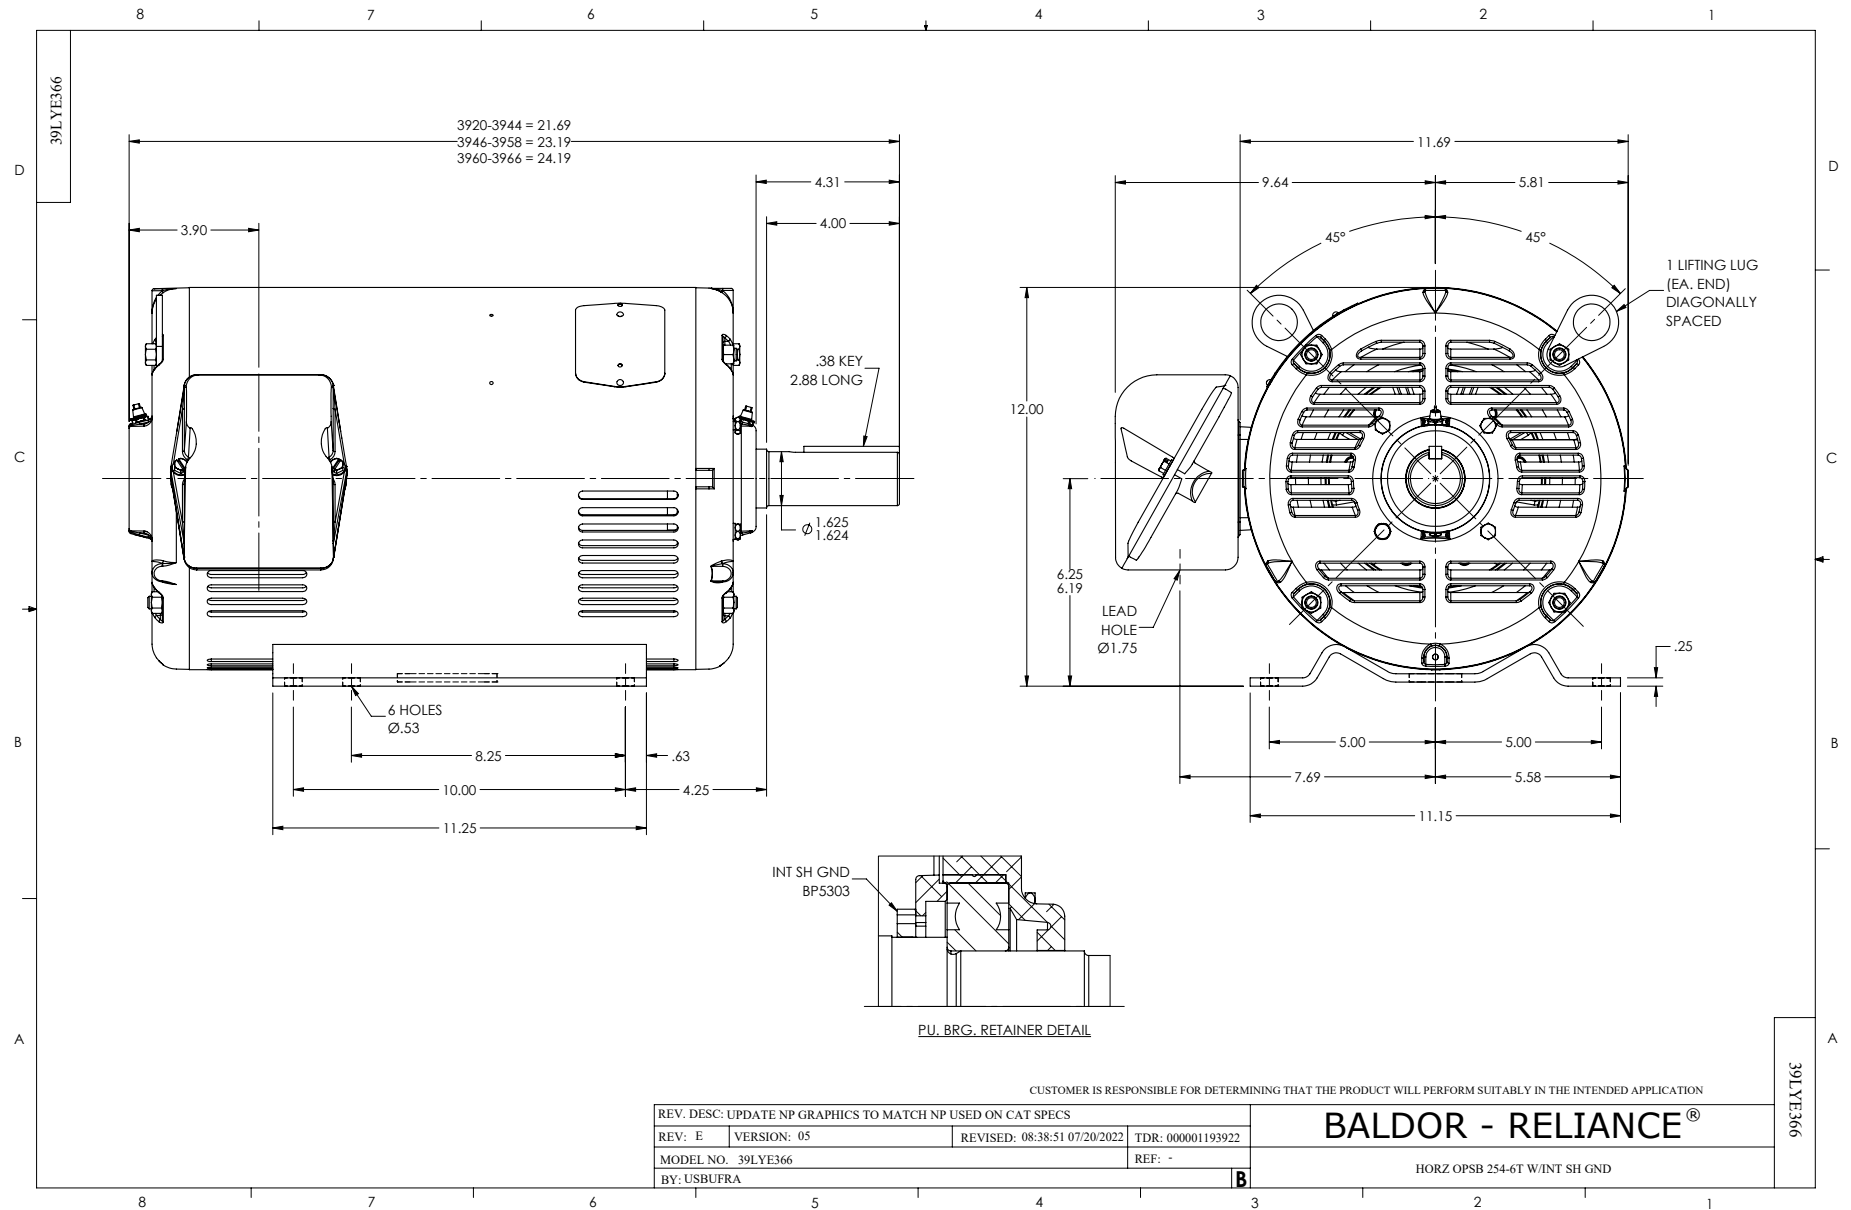


CD0180

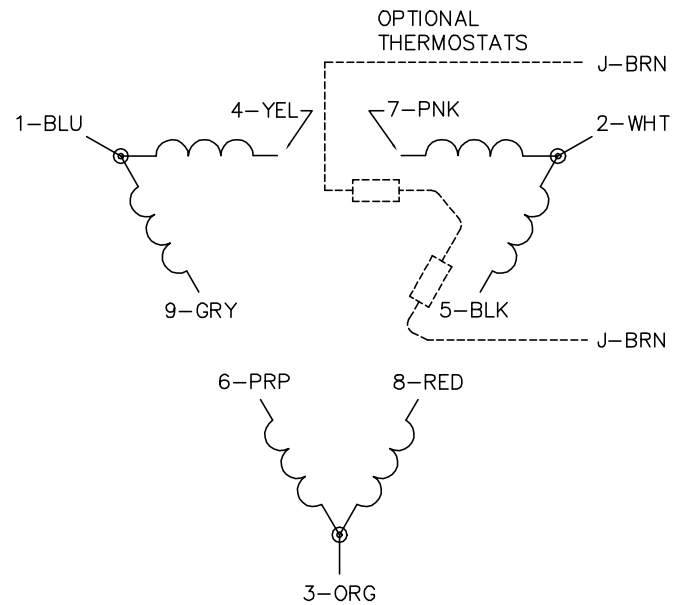

LOW VOLTAGE  
(2D)

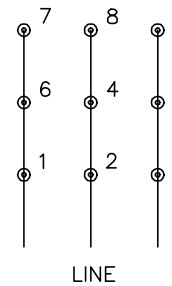

HIGH VOLTAGE  
(1D)

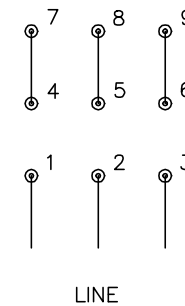

**NOTES:**

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10: 25: 29 02/19/2019	BY: ENBRIRO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1