

**BALDOR • RELIANCE**

---

# Customer information packet

## EM2535T-G

30HP, 1775RPM, 3PH, 60HZ, 286T, 4060M, OPSB, N

## Specifications

Enclosure	OPSB
Frame	286T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	72.000 A @ 230.0 V 76.000 A @ 208.0 V 36.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	36.0 a

## Part detail

Revision	V
Type	AC
Mech. spec.	40E246
Base	
Status	PRD/A
Elec. spec.	40WGX339
Layout	40LYE246
Eff. date	09-15-2025
CD Diagram	CD0005
Poles	04
Leads	9#10
Proprietary	False
Created date	05-27-2016

Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4060M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	26.06 IN
Power Factor	82
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**Nameplate**

NP3554LUA										
<b>CAT.NO.</b>	EM2535T-G			<b>P/N</b>				<b>ENCL</b>		<b>OPSB</b>
<b>SPEC.</b>	40E246X339G1	<b>CC</b>	010A	<b>FRAME</b>		286T	<b>SER.NO.</b>			
<b>HP</b>	30	<b>CLASS</b>		H	<b>HZ</b>	60				
<b>RPM</b>	1775	<b>PH</b>	3	<b>DES</b>		A				
<b>VOLTS</b>	230/460			<b>CODE</b>		H	<b>ODE BRG</b>	6309	<b>DE BRG</b>	6311
<b>AMPS</b>	74/37									
<b>RATING</b>	40C AMB-CONT			<b>NEMA-NOM-EFF</b>			94.1	<b>GREASE</b>	POLYREX EM	
<b>PF</b>	80	<b>SER.F.</b>	1.15	<b>CT30-60(2:1) VT3-60(20:1)</b>						
<b>USABLE AT</b>	50HZ 30HP 190/380V 86/43A			<b>SF1.0</b>						
<b>HTR-VOLTS</b>	<b>HTR-AMPS</b>	<b>MAX. SPACE HEATER TEMP.</b>								

**AC Induction Motor Performance Data**

Record # 57330

Typical performance - not guaranteed values

<b>Winding: 40WGX339-R002</b>		<b>Type: 4060M</b>		<b>Enclosure: OPSB</b>	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	30	<b>Full Load Torque</b>	88.8 LB-FT		
<b>Volts</b>	230/460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	72/36	<b>Breakdown Torque</b>	280 LB-FT		
<b>R.P.M.</b>	1775	<b>Pull-up Torque</b>	130 LB-FT		
<b>Hz</b>	60 <b>Phase</b>	3	<b>Locked-rotor Torque</b>	161 LB-FT	
<b>NEMA Design Code</b>	A	<b>KVA Code</b>	H	<b>Starting Current</b>	252 A
<b>Service Factor (S.F.)</b>	1.15		<b>No-load Current</b>	15.4 A	
<b>NEMA Nom. Eff.</b>	94.1	<b>Power Factor</b>	82	<b>Line-line Res. @ 25°C</b>	0.22043 Ω
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	29°C	
<b>S.F. Amps</b>			<b>Temp. Rise @ S.F. Load</b>	35°C	
			<b>Locked-rotor Power Factor</b>	31.4	

**Load Characteristics 460 V, 60 Hz, 30 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	44	67	77	82	85	85	84
<b>Efficiency</b>	90.5	93.8	94.4	94.3	93.9	93.2	94.1
<b>Speed</b>	1793.6	1788.1	1782.5	1776.9	1770.4	1763.1	1773
<b>Line amperes</b>	17.7	22.5	29	36.3	44.3	53	41.1


ABB Motors and Mechanical Inc.

WINDING # 40WGX339


Typical performance - not guaranteed values.

30 HP 3 PH 60 HZ 1775 RPM 460 V 4060M


TORQUES (LB-FT): PO=280 PU=130 LR=161 LRA=252

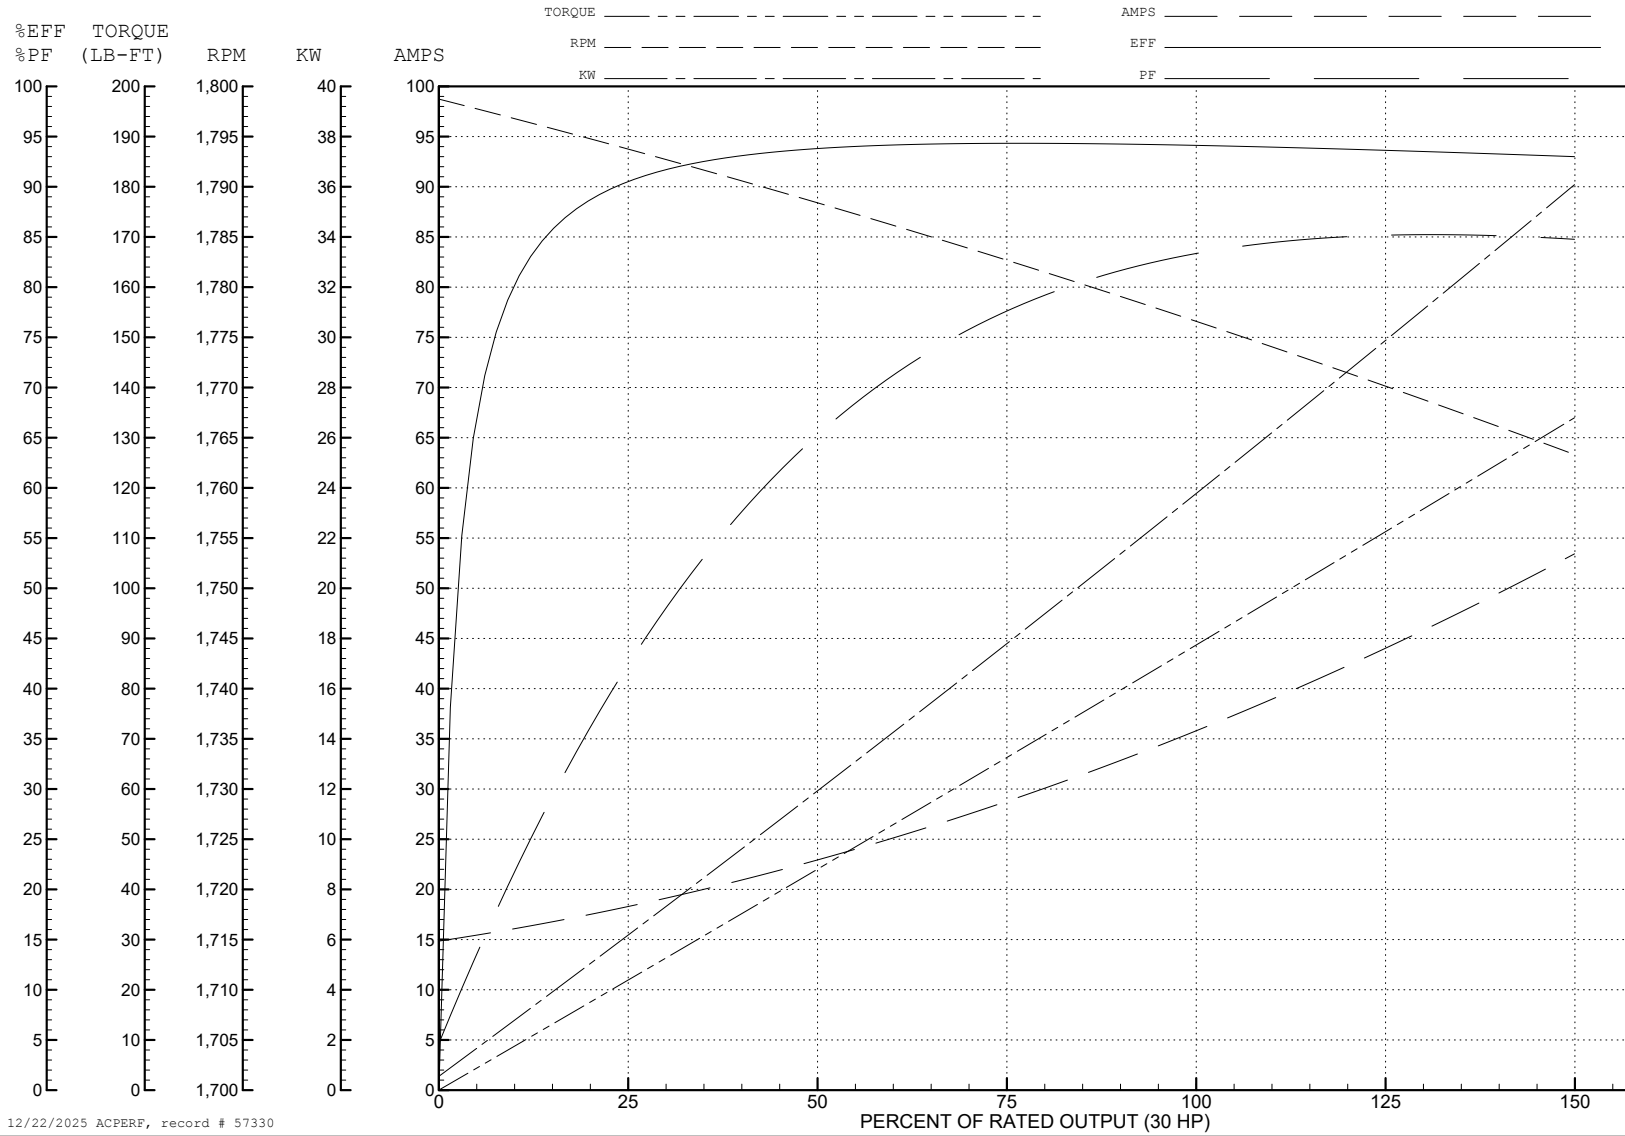


12/22/2025 ACPERF, record # 57330

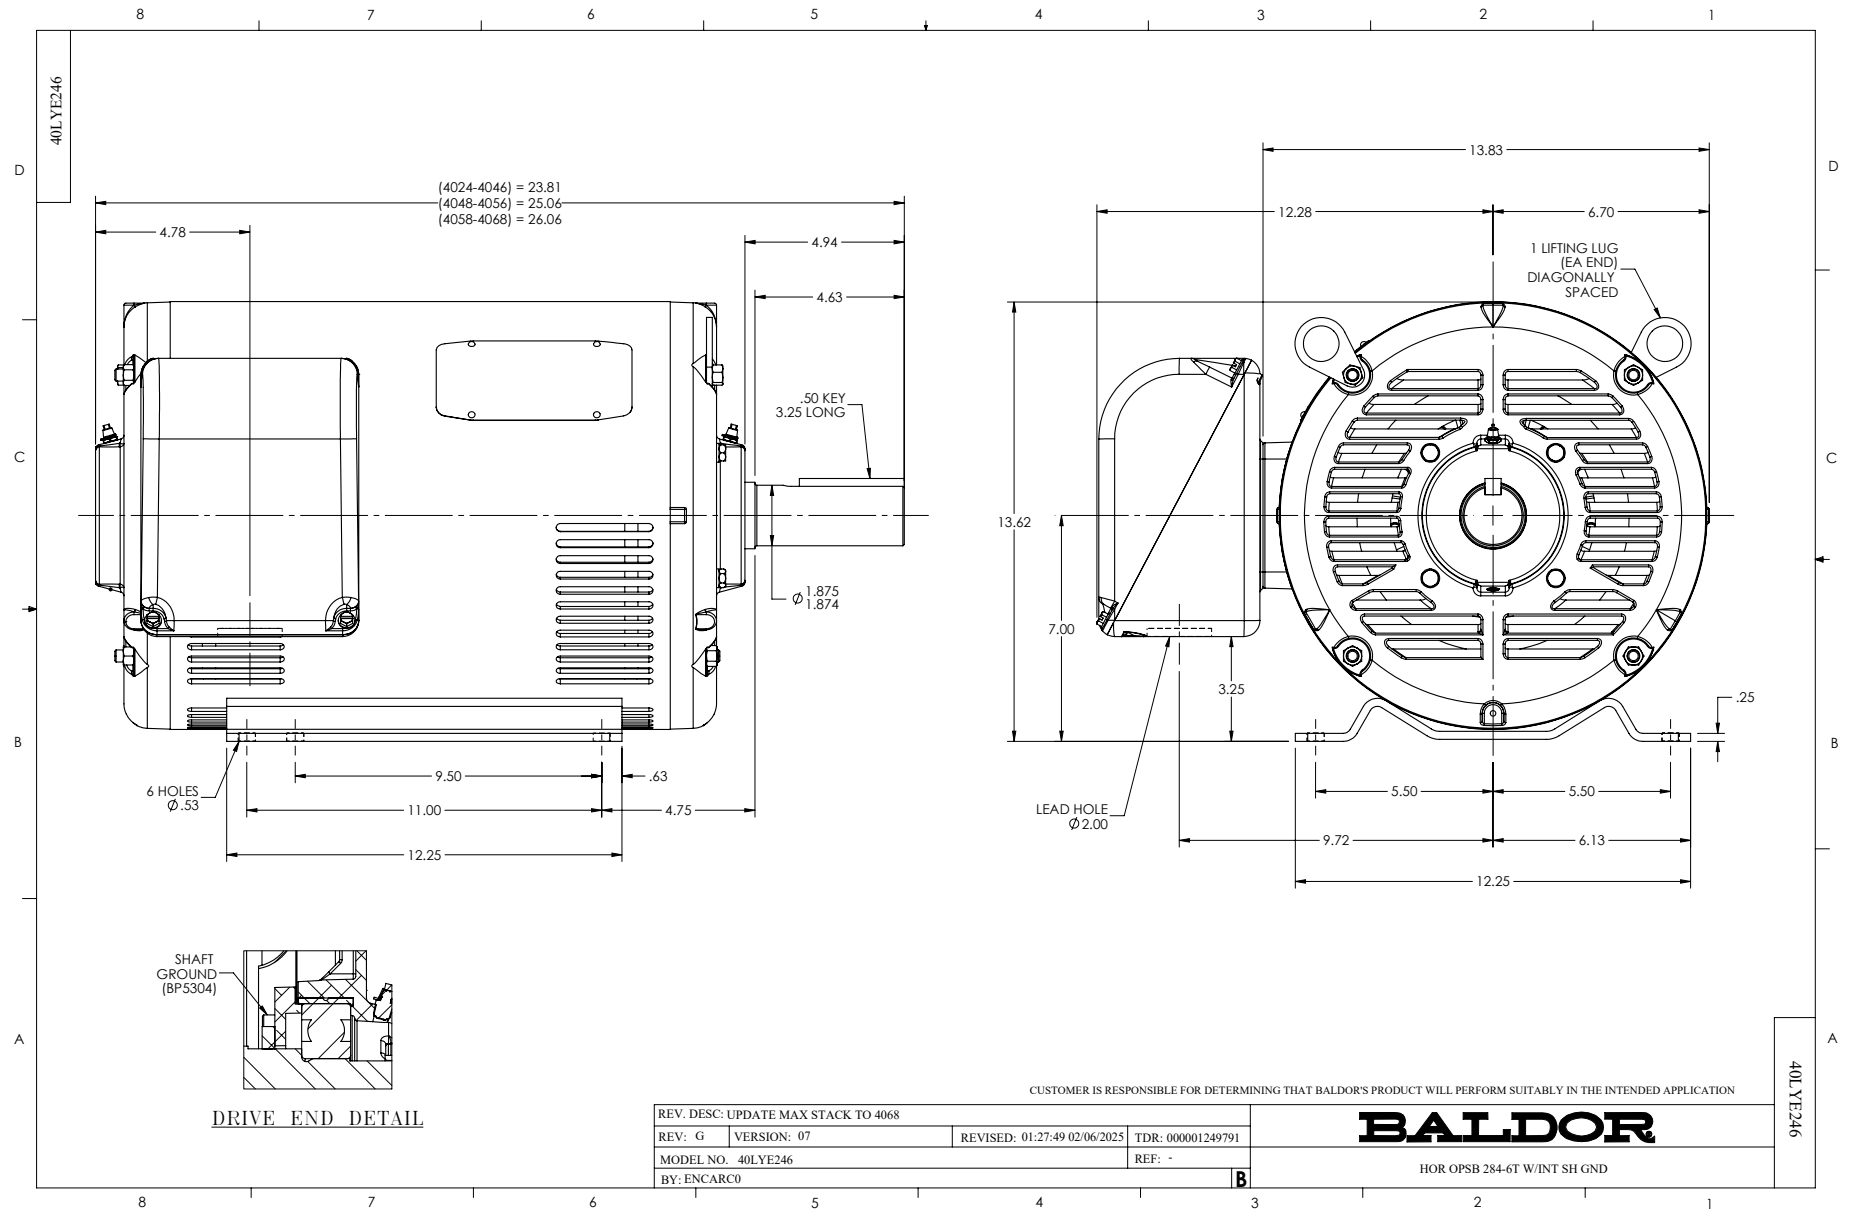

CD0005

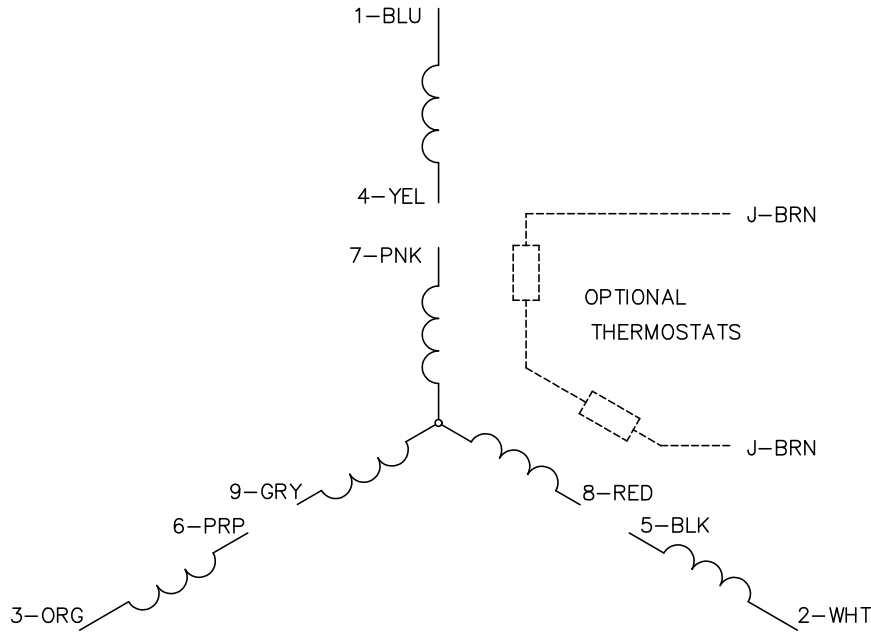


LOW VOLTAGE  
(2Y)

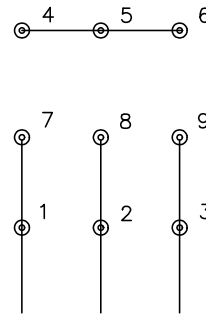

LINE

HIGH VOLTAGE  
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS