

BALDOR • RELIANCE

Customer information packet

FPM2550T-2/4

100HP, 3530RPM, 3PH, 60HZ, 365TS, 4260M, OPSB

A

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.

3/6/2026 11:36:41 AM

Specifications

Enclosure	OPSB
Frame	365TS
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	100.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ 400.0 V @ 60 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	130.000 A @ 400.0 V 260.000 A @ 200.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	130.0 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	D
Type	AC
Mech. spec.	42E360
Base	
Status	PRD/A
Elec. spec.	42WGW983
Layout	42LYE360
Eff. date	07-24-2023
CD Diagram	CD0104
Poles	02
Leads	12#6
Proprietary	False
Created date	03-20-2017

KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	12 @ 6 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4260M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	28.94 IN
Power Factor	89
Product Family	Fire Pump Motor
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3530 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3454L

CAT.NO.	FPM2550T-2/4	CUST P/N		I.P.	23
SPEC.	42E360W983H2	SER.NO.		FRAME	365TS
HZ	60	HP	100	RPM	3530
VOLTS	200/400	CODE	F	VOLTS	
AMPS	260/130	DES	B	AMPS	
EFF	93	SER.F.	1.15	PF	89
RATING	40C AMB-CONT	DE BRG	6313	GREASE	POLYREX EM
BLANK		ODE BRG	6311	MTR. WT.	571
		CLASS	F	PH	3
		ENCL	OPSB	CC	010A
HTR-VOLTS		HTR-AMPS		HTR-WATTS	

Parts list

Part number	Description	Quantity
SA336196	SA 42E360W983H2	1.000 ea
RA324429	RA 42E360W983H2	1.000 ea
HA6360	LIFTING LUG FOR 42 FRAME MOTORS.	2.000 ea
HA6017	CAST ADAPTER, 40,42 KOBX	1.000 ea
19XW3118A12	.31-18 X .75 HEX WASHER HEAD TAPTITE II	2.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	2.000 ea
12CB1002A48	CONDUIT BOX, W/3.62 DIA. LEAD HOLE	1.000 ea
19XW3118A16	.31-18 HEX WASHER HEAD TAPTITE II 1.00 L	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
WD1000B53	TERMINAL BURNDY KPA34	1.000 ea
10XN5013K10	1/2-13 X .625 HEX HD, GRADE 5	1.000 ea
HW1001A50	LOCKWASHER 1/2, ZINC PLT,.879 OD, .509 I	1.000 ea
42EP3200A01	FR ENDPLATE, MACH	1.000 ea
HW5100A13	W4627-047 WVY WSHR	1.000 ea
42EP1202A01	STD PU ENDPLATE MODEL 42 313 BRG.	1.000 ea
10XN3816K44	3/8-16 X 2.75 HEX HD CAP SCREW, GRADE 5	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
XY5013A12	NUT,1/2-13,HEX,STEEL,ZINCPLATED	8.000 ea
18CB1501A01	CONDUIT BOX LID, MODEL 318 OPEN	1.000 ea
10XN3118K16	5/16-18 X 1' GRADE #5, STL, ZINC PLATE	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
HW2501H18	KEY, 1/2 SQ X 2.000	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.030 lb
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
MG1025R44	WILKOFAS, 784.109, CARMINE RED #3002	0.050 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea

42AD2001B01	BAFFLE PLATE 42 OPEN, SLOTTED BAND MTRS	1.000 ea
42AD2001B01	BAFFLE PLATE 42 OPEN, SLOTTED BAND MTRS	1.000 ea
HA3151A08	THRUBOLT STUD 1/2-13 X 21.000	4.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0104A01	CONNECTION DIAGRAM	1.000 ea
NP3454L	ALUM FIRE PUMP MOTOR(LEGACY/BALDOR ONLY)	1.000 ea
42PA1000	PACKAGING GROUP PRINT PK1024A07	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/22	1.000 ea
PE-0000013	ZRTG PE ASSEMBLY	1.000 ea

AC Induction Motor Performance Data

Record # 54843

Typical performance - not guaranteed values

Winding: 42WGW983-R001		Type: 4260M		Enclosure: OPSB	
Nameplate Data			400 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	100		Full Load Torque	148 LB-FT	
Volts	200/400		Start Configuration	direct on line	
Full Load Amps	260/130		Breakdown Torque	511 LB-FT	
R.P.M.	3530		Pull-up Torque	203 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	247 LB-FT
NEMA Design Code	B		KVA Code	F	
Service Factor (S.F.)	1.15		Starting Current	795 A	
NEMA Nom. Eff.	93	Power Factor	89	No-load Current	30.8 A
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	56°C	
S.F. Amps			Temp. Rise @ S.F. Load	67°C	
			Locked-rotor Power Factor	20.8	
			Rotor inertia	4.69 LB-FT ²	

Load Characteristics 400 V, 60 Hz, 100 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	66	83	87	89	88	87	88
Efficiency	91.9	94	94	93.2	92.2	90.7	92.6
Speed	3587	3572	3555	3536	3515	3491	3523
Line amperes	44.7	69.6	98.8	130	164	201	150


ABB Motors and Mechanical Inc.

WINDING # 42WGW983

100 HP 3 PH 60 HZ 3530 RPM 400 V 4260M


Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=511 PU=203 LR=247 LRA=795

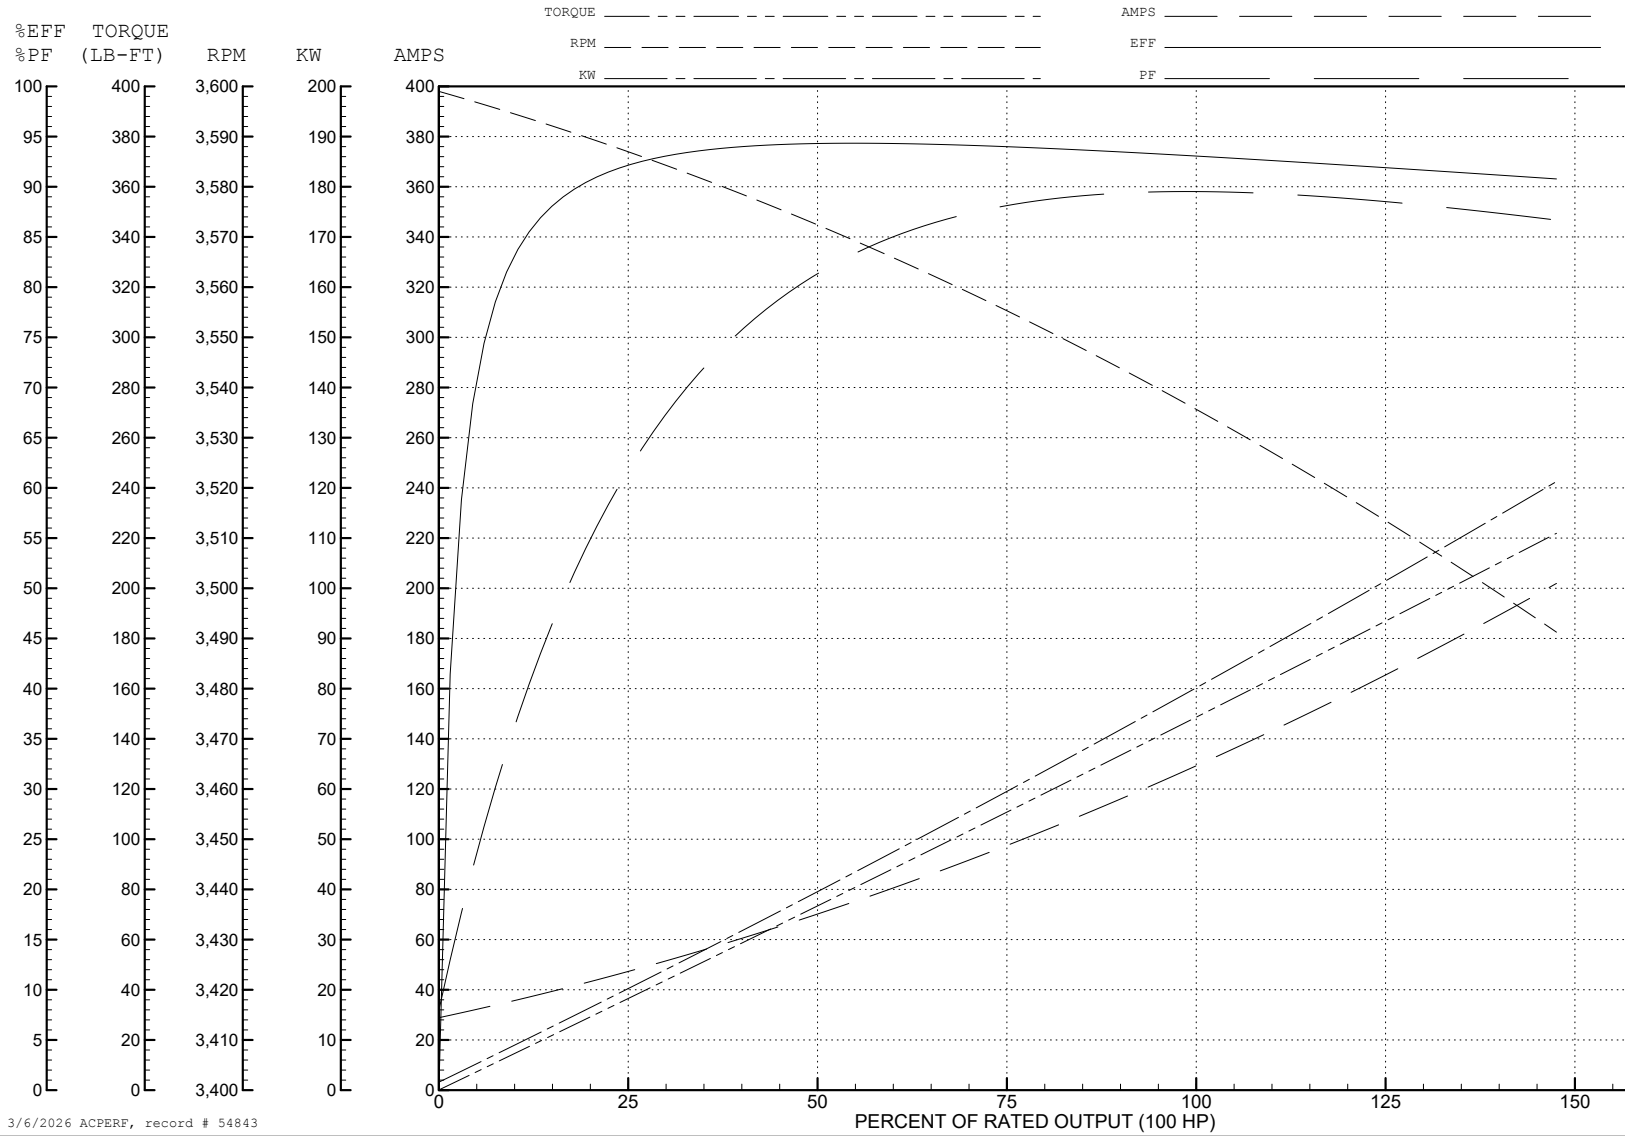


3/6/2026 ACPERF, record # 54843

CD0104

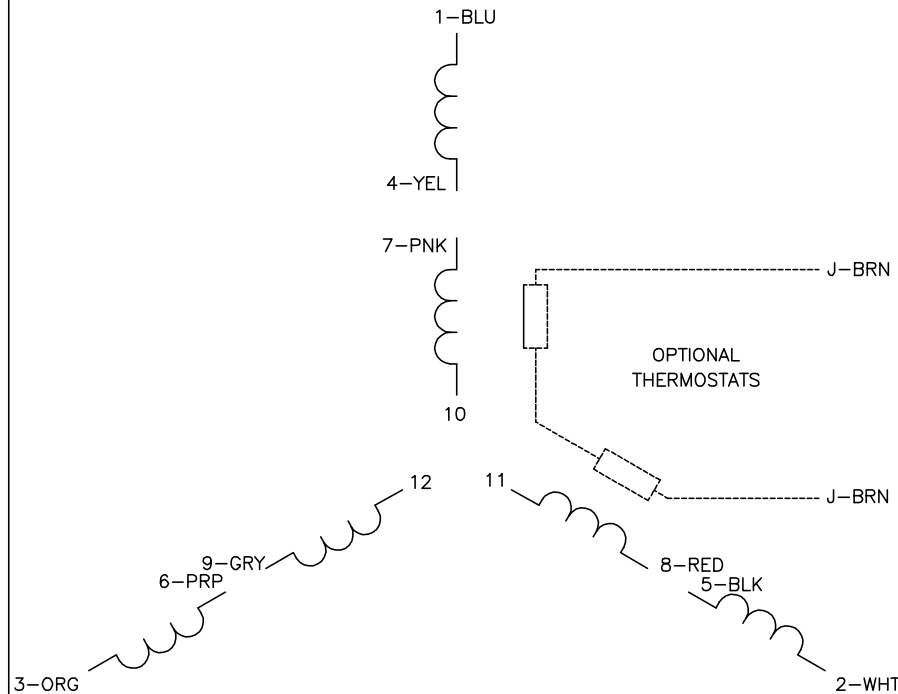


LOW VOLTAGE

START (2Y)

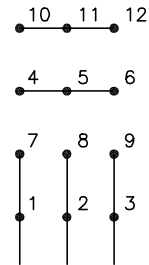

LINE


RUN (2D)

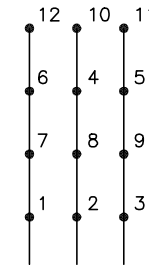

LINE


HIGH VOLTAGE

START (1Y)

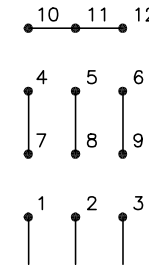

LINE

RUN (1D)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0104

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00008\377	REVISED: 09:02:55 02/19/2019	BY: ENBRIRO
MTL: -	© □	

BALDOR - RELIANCE®

3PH, DV, 12 LEADS, Y START/D RUN

SH 1 of 1