



---

# Customer information packet

## AEM3689-4

2HP, 1760RPM, 3PH, 60HZ, 184, 0626M, TEFC, F1, N

Class - None

Division - Not Applicable

## Specifications

|                                |                           |
|--------------------------------|---------------------------|
| Enclosure                      | TEFC                      |
| Frame                          | 184                       |
| Frame Material                 | Iron                      |
| Frequency                      | 60.00 Hz                  |
| Haz Area Class and Group       | None                      |
| Haz Area Division              | Not Applicable            |
| Motor Letter Type              | Three Phase               |
| Output @ Frequency             | 2.000 HP @ 60 HZ          |
| Phase                          | 3                         |
| Synchronous Speed @ Frequency  | 1800 RPM @ 60 HZ          |
| Voltage @ Frequency            | 460.0 V @ 60 HZ           |
| Agency Approvals               | UR<br>CSA                 |
| Ambient Temperature            | 65 °C                     |
| Auxiliary Box                  | NO AUXILLARY BOX          |
| Auxiliary Box Lead Termination | None                      |
| Base Indicator                 | Rigid                     |
| Bearing Grease Type            | Polyrex EM (-20F +300F)   |
| Blower                         | None                      |
| Current @ Voltage              | 2.700 A @ 460.0 V         |
| Design Code                    | B                         |
| Drip Cover                     | No Drip Cover             |
| Duty Rating                    | CONT                      |
| Efficiency @ 100% Load         | 88.5 %                    |
| Electrically Isolated Bearing  | Not Electrically Isolated |
| Feedback Device                | NO FEEDBACK               |
| Front Face Code                | Standard                  |
| Front Shaft Indicator          | None                      |
| Heater Indicator               | No Heater                 |
| High Voltage Full Load Amps    | 2.7 a                     |
| Insulation Class               | F                         |
| Inverter Code                  | Inverter Ready            |

## Part detail

|              |            |
|--------------|------------|
| Revision     | H          |
| Type         | AC         |
| Mech. spec.  | 06F062     |
| Base         |            |
| Status       | PRD/A      |
| Elec. spec.  | 06WGX252   |
| Layout       | 06LYF062   |
| Eff. date    | 03-26-2021 |
| CD Diagram   | CD0006     |
| Poles        | 04         |
| Leads        | 3#16       |
| Proprietary  | False      |
| Created date | 02-25-2015 |

|                                      |                         |
|--------------------------------------|-------------------------|
| <b>KVA Code</b>                      | K                       |
| <b>Lifting Lugs</b>                  | Standard Lifting Lugs   |
| <b>Locked Bearing Indicator</b>      | No Locked Bearing       |
| <b>Motor Lead Exit</b>               | Ko Box                  |
| <b>Motor Lead Quantity/Wire Size</b> | 3 @ 16 AWG              |
| <b>Motor Lead Termination</b>        | Flying Leads            |
| <b>Motor Standards</b>               | NEMA                    |
| <b>Motor Type</b>                    | 0626M                   |
| <b>Mounting Arrangement</b>          | F1                      |
| <b>Number of Poles</b>               | 4                       |
| <b>Overall Length</b>                | 14.74 IN                |
| <b>Power Factor</b>                  | 77                      |
| <b>Product Family</b>                | Automotive (Not For DC) |
| <b>Pulley End Bearing Type</b>       | Ball                    |
| <b>Pulley Face Code</b>              | Standard                |
| <b>Pulley Shaft Indicator</b>        | Standard                |
| <b>Rodent Screen</b>                 | None                    |
| <b>RoHS Status</b>                   | ROHS COMPLIANT          |
| <b>Service Factor</b>                | 1.00                    |
| <b>Shaft Diameter</b>                | 0.875 IN                |
| <b>Shaft Extension Location</b>      | Pulley End              |
| <b>Shaft Ground Indicator</b>        | No Shaft Grounding      |
| <b>Shaft Rotation</b>                | Reversible              |
| <b>Shaft Slinger Indicator</b>       | No Slinger              |
| <b>Speed</b>                         | 1760 rpm                |
| <b>Speed Code</b>                    | Single Speed            |
| <b>Starting Method</b>               | Direct on line          |
| <b>Thermal Device - Bearing</b>      | None                    |
| <b>Thermal Device - Winding</b>      | None                    |
| <b>Vibration Sensor Indicator</b>    | No Vibration Sensor     |
| <b>Winding Thermal 1</b>             | None                    |
| <b>Winding Thermal 2</b>             | None                    |

**Nameplate**

| <b>NP1404</b>       |              |  |               |      |  |            |   |  |             |
|---------------------|--------------|--|---------------|------|--|------------|---|--|-------------|
| <b>CAT.NO.</b>      | AEM3689-4    |  |               |      |  |            |   |  |             |
| <b>SPEC.</b>        | 06F062X252G1 |  |               |      |  |            |   |  |             |
| <b>VOLTS</b>        | 460          |  |               |      |  |            |   |  |             |
| <b>AMP</b>          | 2.7          |  |               |      |  |            |   |  |             |
| <b>RPM</b>          | 1760         |  | <b>HP</b>     | 2    |  |            |   |  |             |
| <b>FRAME</b>        | 184          |  | <b>HZ</b>     | 60   |  | <b>PH</b>  | 3 |  |             |
| <b>SER.F.</b>       | 1.00         |  | <b>CODE</b>   | K    |  | <b>DES</b> | B |  | <b>CL</b> F |
| <b>NEMA-NOM-EFF</b> | 88.5         |  | <b>PF</b>     | 77   |  |            |   |  |             |
| <b>G.MIN.EFF</b>    | 84.0         |  | <b>CC</b>     | 010A |  |            |   |  |             |
| <b>RATING</b>       | 65C AMB-CONT |  |               |      |  |            |   |  |             |
| <b>LUBRICATION</b>  | POLYREX EM   |  |               |      |  |            |   |  |             |
| <b>DE</b>           | 6206         |  | <b>ODE</b>    | 6205 |  |            |   |  |             |
| <b>ENCL</b>         | TEFC         |  | <b>SER. #</b> |      |  |            |   |  |             |

**Accessories**

| <b>Part number</b> | <b>Description</b> | <b>Multiplier</b> |
|--------------------|--------------------|-------------------|
| 36-1037            | C FACE KIT         | A8                |

**AC Induction Motor Performance Data**

Record # 50988

Typical performance - not guaranteed values

| <b>Winding: 06WGX252-R016</b> |                          | <b>Type: 0626M</b>         |   | <b>Enclosure: TEFC</b> |  |
|-------------------------------|--------------------------|----------------------------|---|------------------------|--|
| <b>Nameplate Data</b>         |                          |                            | <b>460 V, 60 Hz:<br/>Single Voltage Motor</b> |                        |  |
| <b>Rated Output (HP)</b>      | 2                        | <b>Full Load Torque</b>    | 5.99 LB-FT                                    |                        |  |
| <b>Volts</b>                  | 460                      | <b>Start Configuration</b> | direct on line                                |                        |  |
| <b>Full Load Amps</b>         | 2.7                      | <b>Breakdown Torque</b>    | 20.3 LB-FT                                    |                        |  |
| <b>R.P.M.</b>                 | 1760                     | <b>Pull-up Torque</b>      | 10.9 LB-FT                                    |                        |  |
| <b>Hz</b>                     | 60 <b>Phase</b>          | 3                          | <b>Locked-rotor Torque</b>                    | 12.5 LB-FT             |  |
| <b>NEMA Design Code</b>       | <b>B KVA Code</b>        | K                          | <b>Starting Current</b>                       | 19.6 A                 |  |
| <b>Service Factor (S.F.)</b>  |                          | 1                          | <b>No-load Current</b>                        | 1.53 A                 |  |
| <b>NEMA Nom. Eff.</b>         | 88.5 <b>Power Factor</b> | 77                         | <b>Line-line Res. @ 25°C</b>                  | 6.7414 Ω               |  |
| <b>Rating - Duty</b>          | 65C AMB-CONT             |                            | <b>Temp. Rise @ Rated Load</b>                | 24°C                   |  |

**Load Characteristics 460 V, 60 Hz, 2 HP**

| <b>% of Rated Load</b> | <b>25</b> | <b>50</b> | <b>75</b> | <b>100</b> | <b>125</b> | <b>150</b> |
|------------------------|-----------|-----------|-----------|------------|------------|------------|
| <b>Power Factor</b>    | 35        | 55        | 68        | 75         | 80         | 82         |
| <b>Efficiency</b>      | 81.8      | 88        | 89.3      | 89.2       | 88.5       | 87.2       |
| <b>Speed</b>           | 1790.2    | 1781.4    | 1771.7    | 1761.2     | 1750.2     | 1737.1     |
| <b>Line amperes</b>    | 1.67      | 1.93      | 2.33      | 2.8        | 3.33       | 3.94       |


ABB Motors and Mechanical Inc.

WINDING # 06WGX252


Typical performance - not guaranteed values.

2 HP 3 PH 60 HZ 1760 RPM 460 V 0626M




TORQUES (LB-FT): PO=20.3 PU=10.9 LR=12.5 LRA=19.6

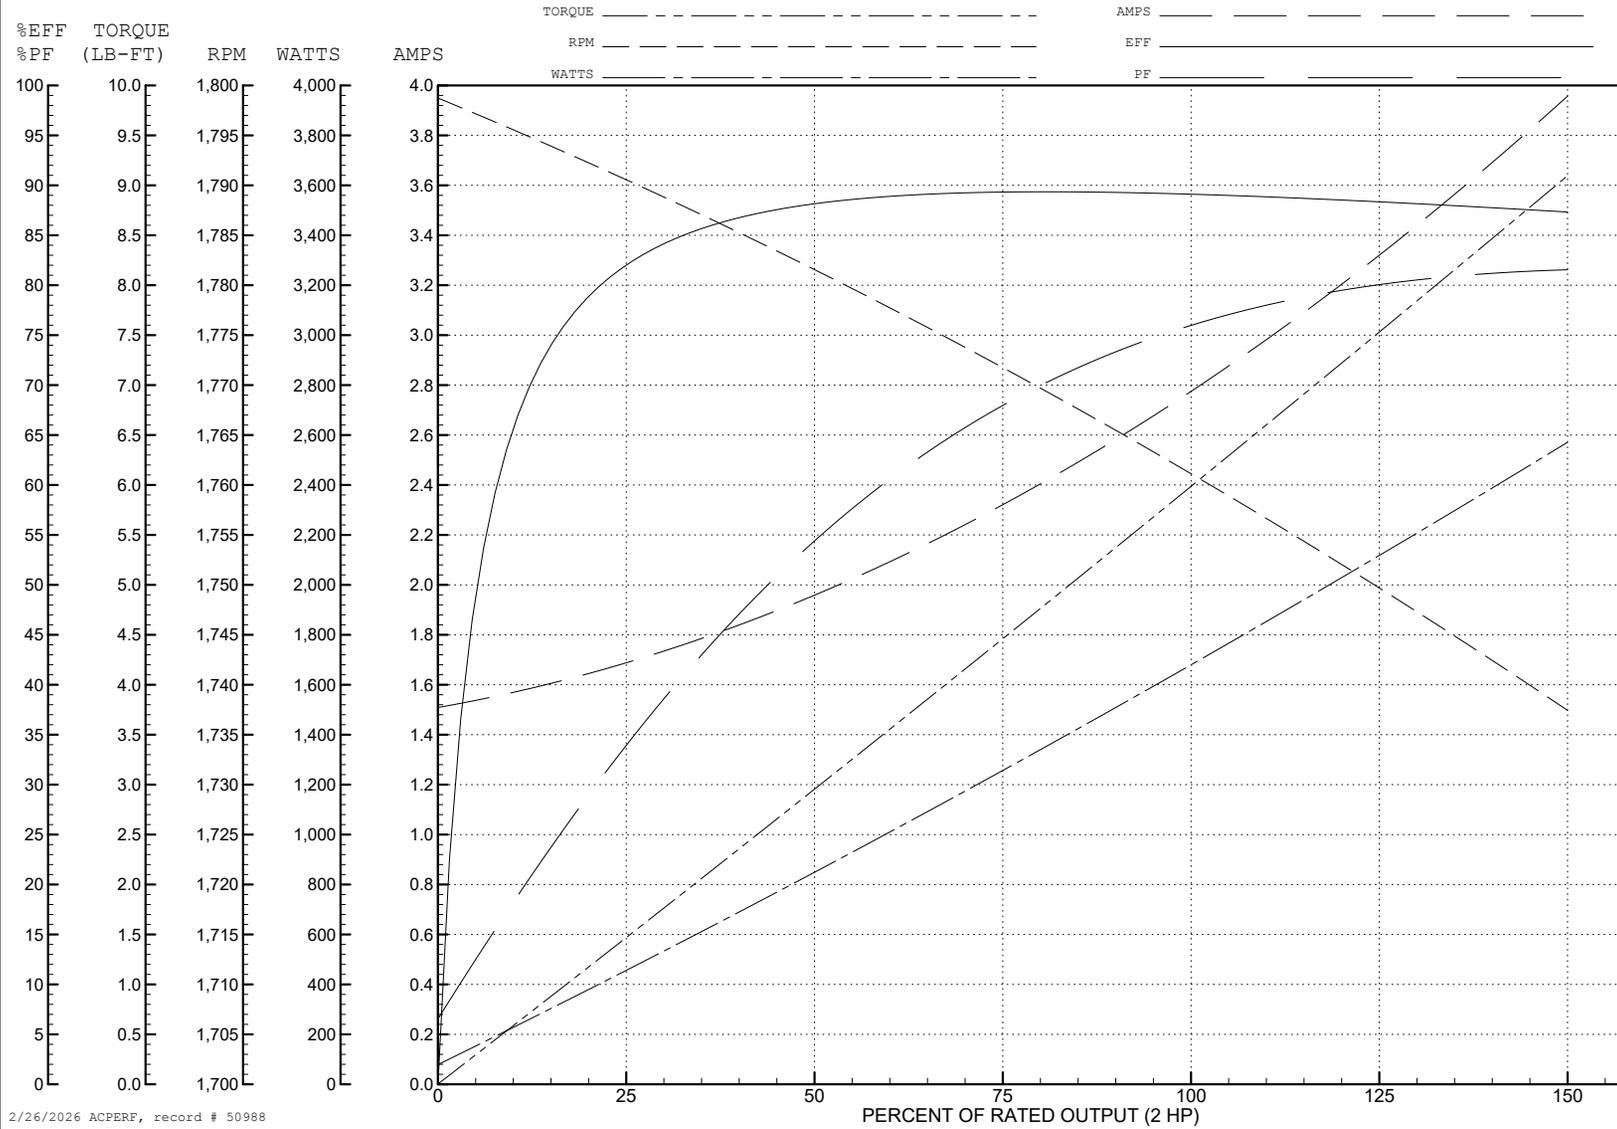

2/26/2026 ACPERF, record # 50988

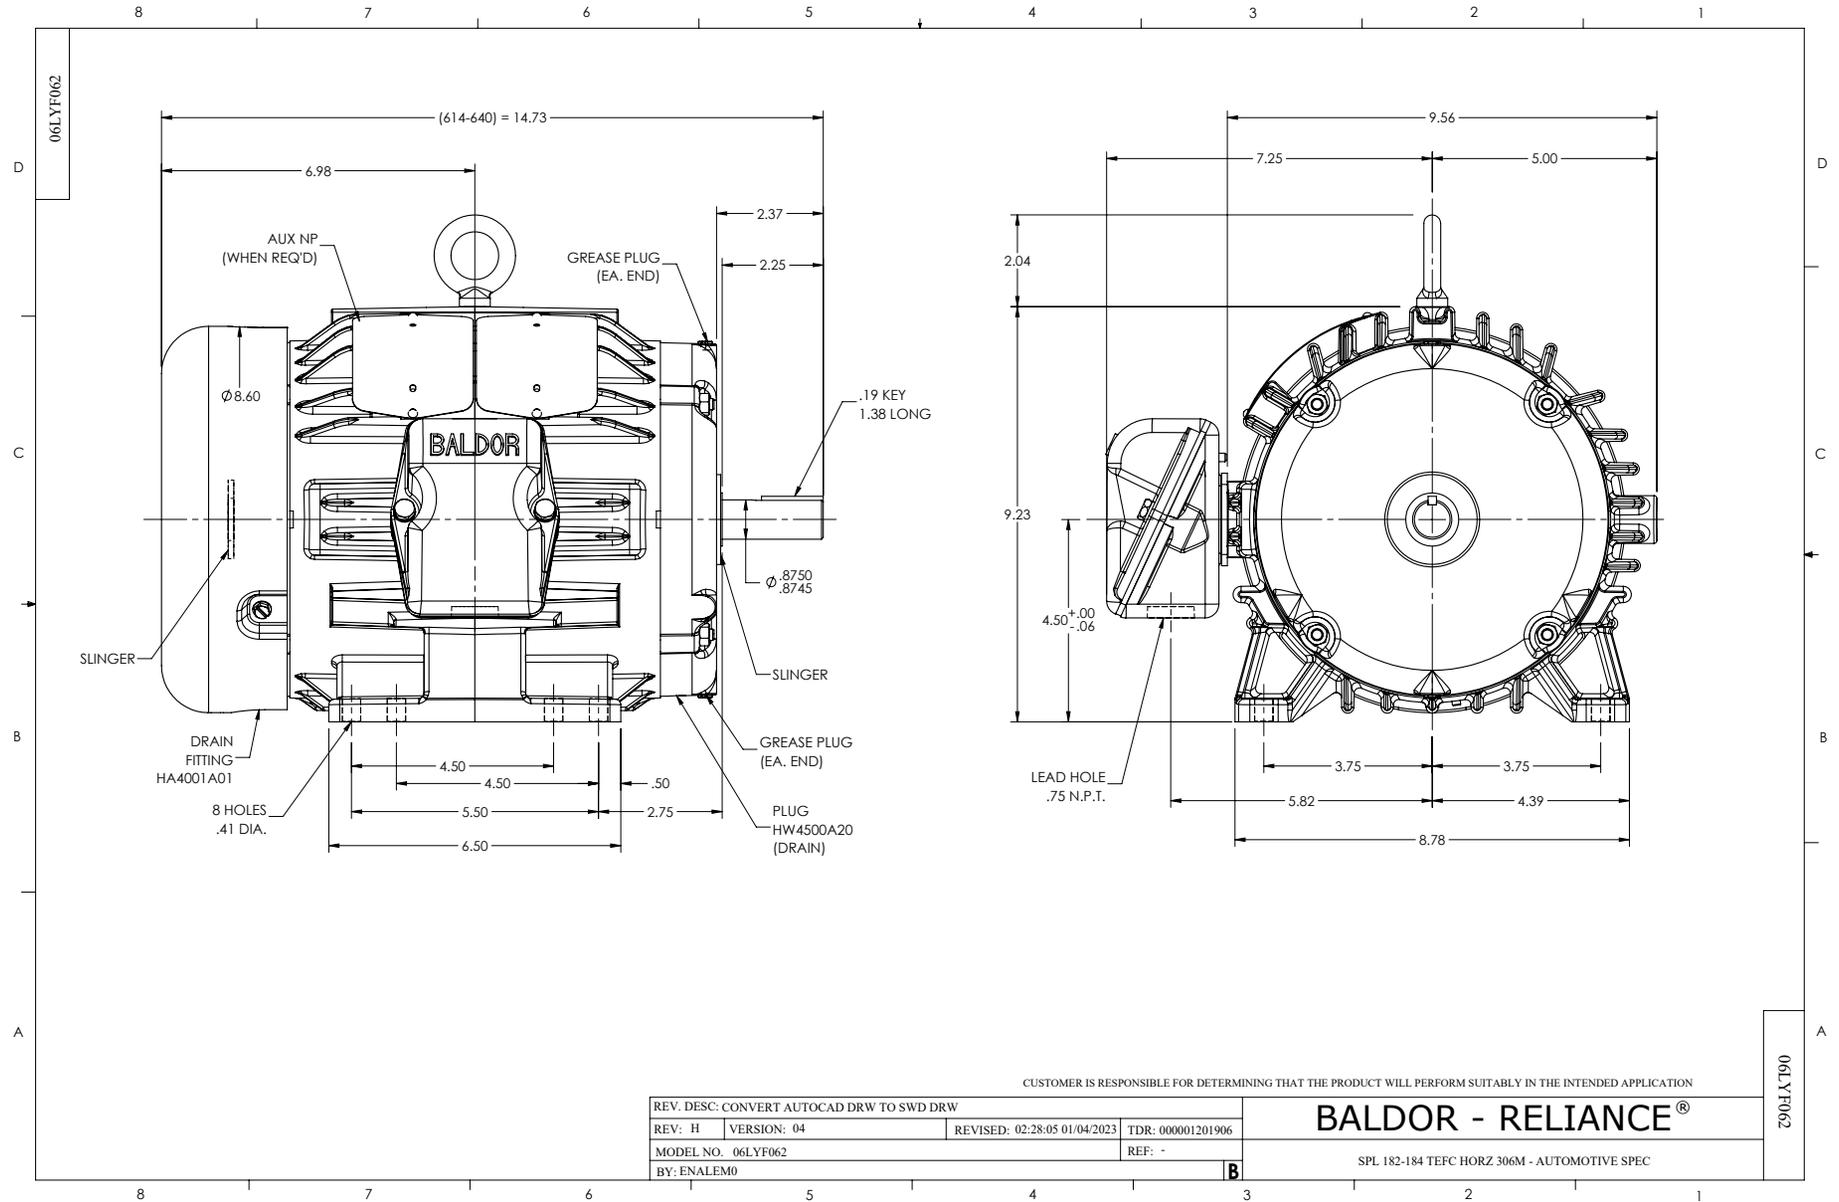

CD0006

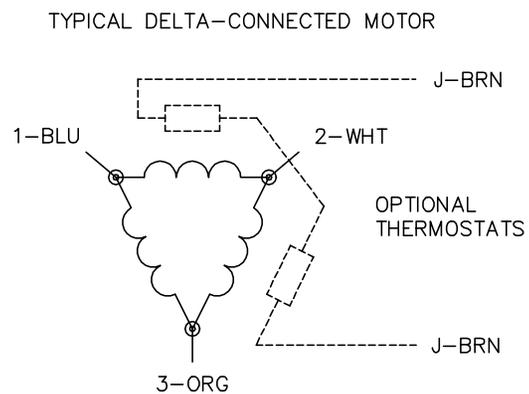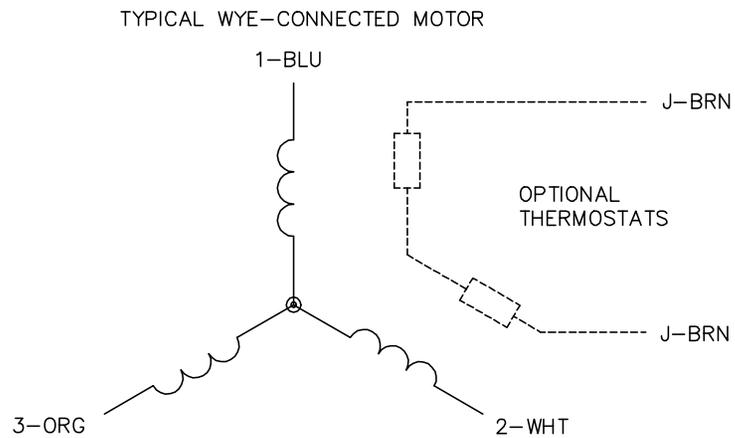

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

|                                   |                              |                   |
|-----------------------------------|------------------------------|-------------------|
| REV. DESC: ADD CLASS CONN00000007 |                              |                   |
| REV. LTR: E                       | VERSION: 01                  | TDR: 000001099922 |
| FILE: \AAA\00005\141              | REVISED: 10:24:49 02/19/2019 | BY: ENBRIRO       |
| MTL: -                            | © □                          |                   |

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1